

LED Linear Fixtures



T5 Integrated LED Fixture




- Single End Input. Support Multiple Connections
- No Light Flickering IC Driver
- ALU+PC / Full PC Body Option
- Plug-and-Socket / Male & Female Connectors Solutions, Optional Switches

01

Adjust CCT button switch



Series system

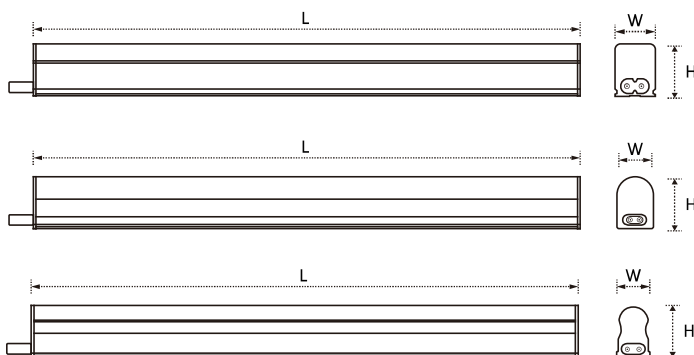

CB CE ErP 



No Flicker



Ra80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYT5F201-E5 XGYT5F701-E5	23*34*300	5W	80-160 lm/W	3000K-8000K	25	36*21*14
XGYT5F202-E9 XGYT5F702-E9	23*34*572	9W	80-160 lm/W	3000K-8000K	25	64*21*14
XGYT5F203-E12 XGYT5F703-E12	23*34*880	12W	80-160 lm/W	3000K-8000K	25	94*21*14
XGYT5F204-E18 XGYT5F704-E18	23*34*1178	18W	80-160 lm/W	3000K-8000K	25	124*21*14
XGYT5F205-E22 XGYT5F705-E22	23*34*1478	22/26W	80-160 lm/W	3000K-8000K	25	154*21*14


☒ Lumen Efficacy is Customizable

LED Linear Fixtures




T8 Integrated LED Fixture

02

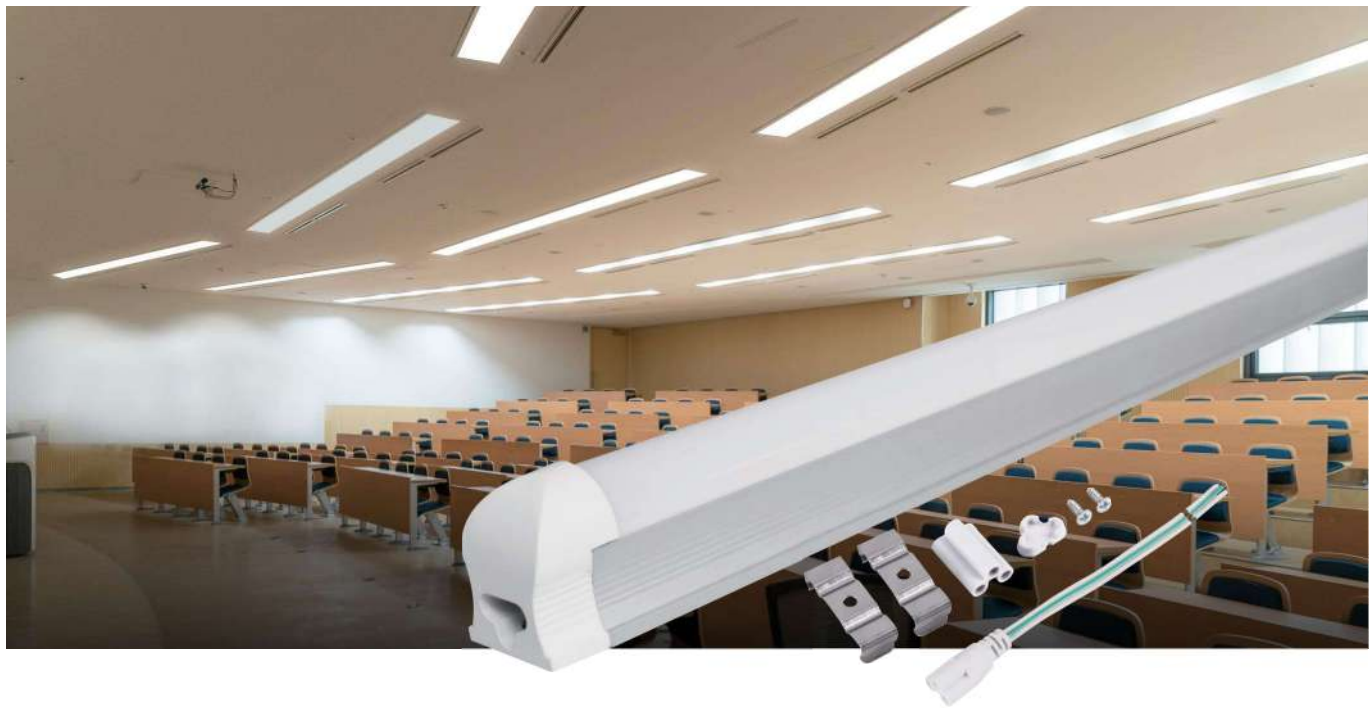

Features :

- High Quality SMD 2835 Chips of Optional Light Efficacy & CCT
- Single End Input. Support Multiple Connections
No Light Flickering IC Driver
- ALU+PC / Full PC Body Option
- Plug-and-Socket / Male & Female Connectors
Solutions, Optional Switches



CB CE ErP 



No Flicker



Ra80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYT8F201-E5/10	30*36*300	5/10W	80-150 lm/W	3000K-8000K	25	36*20.5*18
XGYT8F202-E9/18	30*36*572	9/18W	80-150 lm/W	3000K-8000K	25	64*20.5*18
XGYT8F203-E12/24	30*36*880	12/24W	80-150 lm/W	3000K-8000K	25	94*20.5*18
XGYT8F204-E18/36	30*36*1178	18/36W	80-150 lm/W	3000K-8000K	25	124*20.5*18
XGYT8F205-E22/44	30*36*1478	22/44W	80-150 lm/W	3000K-8000K	25	154*20.5*18

✕ Lumen Efficacy is Customizable

LED Linear Fixture

Rotatable linear Fixture



03

6500K




4000K




3000K



- ❑ Interconnectable
- ❑ Beam Direction Adjustable 170°
- ❑ Optional 3 CCT / Dimmer Switch
- ❑ Full Plastic Body
- ❑ Optional Male / Female Base



Slide Switch
CCT Control+On/Off

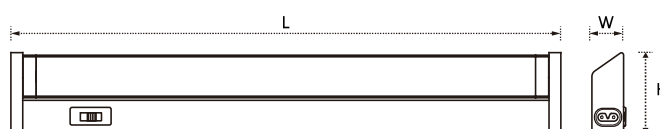

CB CE ErP 



No Flicker



Dimmable
Option



Ra80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



170°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYRLF701-E4	24*61*297	4W	80-160 lm/W	3000K-8000K	25	33.5*33*15
XGYRLF702-E8	24*61*536	8W	80-160 lm/W	3000K-8000K	25	57.5*33*15
XGYRLF703-E12	24*61*836	12W	80-160 lm/W	3000K-8000K	25	87.5*33*15
XGYRLF704-E16	24*61*1134	16W	80-160 lm/W	3000K-8000K	25	117.5*33*15
XGYRLF705-E20	24*61*1434	20W	80-160 lm/W	3000K-8000K	25	147.5*33*15

❑ Lumen Efficacy is Customizable

LED Linear Fixtures

Water-Proof LED Fixture (IP65)

04



IP65
PROTECTION
LEVEL

CB CE ErP 



No Flicker



Ra80
70/80



25000h



S: AC 180-265V
U: AC 85-265V



For Outdoor



320°



0.5/0.9



862 Series

TY-FCG02 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-TY-FCG02-E9/18	58*47*562	9/18W	PG7	80-180 lm/W	3000K-8000K	25	585.5*32.5*27.5
XGYIP65-TY-FCG02-E12/24	58*47*862	12/24W	PG7	80-180 lm/W	3000K-8000K	25	885.5*32.5*27.5
XGYIP65-TY-FCG02-E18/36	58*47*1162	18/36W	PG7	80-180 lm/W	3000K-8000K	25	1185.5*32.5*27.5
XGYIP65-TY-FCG02-E24/40	58*47*1462	24/40W	PG7	80-180 lm/W	3000K-8000K	25	1485.5*32.5*27.5


 Lumen Efficacy is Customizable



SY-3090 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-3090-E9/18	50*34*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	66.5*29*21
XGYIP65-SY-3090-E12/24	50*34*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	96.5*29*21
XGYIP65-SY-3090-E18/36	50*34*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	126.5*29*21
XGYIP65-SY-3090-E24/40	50*34*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	156.5*29*21

☒ Lumen Efficacy is Customizable



JW-T07 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-JW-T07-E9/18	60*30*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	56.5*22*17
XGYIP65-JW-T07-E12/24	60*30*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	86.5*22*17
XGYIP65-JW-T07-E18/36	60*30*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	116.5*22*17
XGYIP65-JW-T07-E24/40	60*30*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	146.5*22*17


☒ Lumen Efficacy is Customizable



TY-TS3001 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-TY-TS3001-E9/18	485*45.3*29.4	9/18W	PG7	80-180 lm/W	3000K-8000K	25	56.5*27*20.5
XGYIP65-TY-TS3001-E12/24	785*45.3*29.4	12/24W	PG7	80-180 lm/W	3000K-8000K	25	86.5*27*20.5
XGYIP65-TY-TS3001-E18/36	1085*45.3*29.4	18/36W	PG7	80-180 lm/W	3000K-8000K	25	116.5*27*20.5
XGYIP65-TY-TS3001-E24/40	1385*45.3*29.4	24/40W	PG7	80-180 lm/W	3000K-8000K	25	146.5*27*20.5


☒ Lumen Efficacy is Customizable



SY-7537 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-7537-E9/18	75*73*520	9/18W	PG7	80-180 lm/W	3000K-8000K	24	55.5*38*28
XGYIP65-SY-7537-E12/24	75*73*820	12/24W	PG7	80-180 lm/W	3000K-8000K	24	185.5*38*28
XGYIP65-SY-7537-E18/36	75*73*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	24	127.5*38*28


☒ Lumen Efficacy is Customizable



SY-11653 Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-SY-11653-E9/18	116*53*520	9/18W	PG7	80-180 lm/W	3000K-8000K	10	54.3*31*27.5
XGYIP65-SY-11653-E12/24	116*53*820	12/24W	PG7	80-180 lm/W	3000K-8000K	10	184.3*31*27.5
XGYIP65-SY-11653-E18/36	116*53*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	10	126.5*31*27.5

☒ Lumen Efficacy is Customizable



JW-T02B Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Cap 灯头	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYIP65-JW-T02B-E9/18	68*43*520	9/18W	PG7	80-180 lm/W	3000K-8000K	25	54.3*37*25.5
XGYIP65-JW-T02B--E12/24	68*43*820	12/24W	PG7	80-180 lm/W	3000K-8000K	25	84.3*37*25.5
XGYIP65-JW-T02B-E18/36	68*43*1120	18/36W	PG7	80-180 lm/W	3000K-8000K	25	114.3*37*25.5
XGYIP65-JW-T02B-E24/40	68*43*1420	24/40W	PG7	80-180 lm/W	3000K-8000K	25	144.3*37*25.5

☒ Lumen Efficacy is Customizable

LED Linear Fixtures




Tri-Proof Fixture



07

Features :

- High Quality Triproof Fixture With or Without Tubes
Single or Double End Wiring
- Plastic / Stainless Steel Side Clamps
Stainless Steel Back Clips
- Optional PC / PS Cover with HIPS / ABS / PC Base
- Optional Tempered Glass with Stainless Steel Base
- Optional Rubber | Silicon Ring to Achieve IP65 Protection Level

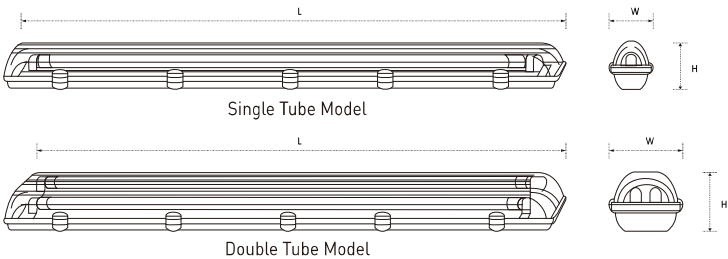

CB CE ErP 



No Flicker



Ra80



25000h



S: 220-240V
U: 100-260V



For Outdoor



160°



0.5/0.9

SMD - OX Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLEDTP-SOX02-E18/20	85*80*600	18/20W	100-160lm/W	3000K-6500K	260	8	62.5*36*19.5
XGYLEDTP-SOX04-E36/40/54	115*80*1200	36/40W/54W	100-160lm/W	3000K-6500K	810	8	122.5*36*19.5
XGYLEDTP-SOX05-E54/60	115*80*1500	54/60W	100-160lm/W	3000K-6500K	1110	6	152.5*27*19.5

SMD - OC Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLEDTP-SOC02-E40	80*70*605	40W	100-160lm/W	3000K-6500K	260	6	65*31*19
XGYLEDTP-SOS04-E60	80*70*1200	60W	100-160lm/W	3000K-6500K	810	6	125*31*19

SMD - OS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Mount Distance 背扣间距	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLEDTP-SOS02-E20	105*78*600	20W	100-160lm/W	3000K-6500K	260	8	62*36*24
XGYLEDTP-SOS04-E40/60	105*78*1200	40/60W	100-160lm/W	3000K-6500K	810	8	122*36*24
XGYLEDTP-SOS05-E60/72	105*78*1500	60/72W	100-160lm/W	3000K-6500K	1110	6	152*25.5*24

Shell - TS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-TS02-E118	70*61*660	1*9W	310	6	1	12	68*22.5*24.5
XGYTP-TS02-E218	107*61*660	2*9W	310	6	2	8	68*22.5*24.5
XGYTP-TS04-E136	70*61*1260	1*18W	910	10	1	12	128.5*22.5*24.5
XGYTP-TS04-E236	107*61*1260	2*18W	910	10	2	8	128.5*22.5*24.5
XGYTP-TS05-E158	70*61*1562	1*24W	1210	14	1	12	159*22.5*24.5
XGYTP-TS05-E258	107*61*1562	2*24W	1210	14	2	8	159*22.5*24.5

☒ Power Is Rated for Fluorescent Tubes

Shell - TX Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-TX-04-E136	66*50*1270	1*18W	1022	10	1	12	129.5*22*24
XGYTP-TX-04-E236	100*62*1270	2*18W	1022	10	2	10	130*28*24.5

Shell - TW/TL Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GX-02-E118	80*76*663	1*9W	350	6	1	12	68.5*24*24
XGYTP-GX-02-E218	100*76*663	2*9W	350	6	2	10	68*30*23
XGYTP-GX-04-E136	80*76*1262	1*18W	750	10	1	12	128*24*24
XGYTP-GX-04-E236	100*76*1262	2*18W	750	10	2	10	128*30*23
XGYTP-GX-05-E158	80*76*1560	1*24W	1224	12	1	12	158.5*26*24
XGYTP-GX-05-E258	100*76*1560	2*24W	1224	12	2	10	158.5*30*23

Shell - HS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-HS04-E136	70*84*1262	1*18W	750	8	1	12	129*26.5*24.5
XGYTP-HS04-E236	110*84*1262	2*18 W	750	8	2	8	129*26.5*25

Shell - GA Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GA-02-E118	70*60*661	1*9W	350	6	1	12	68.5*22*23.5
XGYTP-GA-02-E218	95*60*661	2*9W	350	6	2	10	68.5*27.5*21.5
XGYTP-GA-04-E136	70*60*1271	1*18W	760	10	1	12	129.5*22*24
XGYTP-GA-04-E236	95*60*1271	2*18W	760	10	2	10	129.5*27.5*21.5
XGYTP-GA-05-E158	70*60*1571	1*24W	1224	14	1	12	129.5*22*24
XGYTP-GA-05-E258	95*60*1571	2*24W	1224	14	2	10	159.5*27.5*21.5

Shell - G Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GL02-E218	108*78*673	2*9W	470	6	2	8	68*24*24.5
XGYTP-GL04-E136	79*78*1262	1*18W	750	10	1	12	128*24*26.5
XGYTP-GL04-E236	108*78*1262	2*18W	750	10	2	8	128*24*24.5

Shell - GS Series

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Mount Distance 背扣间距	Clips Num 拉扣数量	No. of Tubes 灯管数量	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYTP-GS-02-E118	80*90*656	1*9W	470	6	1	12	68*28*26.5
XGYTP-GS-02-E218	115*90*656	2*9W	470	6	2	8	68*27*24.5
XGYTP-GS-04-E136	80*90*1260	1*18W	750	10	1	12	128*28*26.5
XGYTP-GS-04-E236	115*90*1260	2*18W	750	10	2	8	128*27*24.5
XGYTP-GS-05-E158	80*90*1560	1*24W	1015	12	1	8	158.5*28*18
XGYTP-GS-05-E258	115*90*1560	2*24W	1015	12	2	8	158.5*27*24.5

LED Linear Fixture




Connectable LED Shop Light



11

Features:

- ❑ Interconnectable Without Dark Area
- ❑ Alu+PC Body
- ❑ Hangable Installation
- ❑ High Power Linear Batten



CB CE ErP 



No Flicker



Ra70/80



25000HRS



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	IP Level IP等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLF-L5-202-E18	50*45*590	18W	80-160 lm/W	3000K-8000K	IP40	12	63*24*17.5
XGYLF-L5-203-E26	50*45*885	26W	80-160 lm/W	3000K-8000K	IP40	12	92.5*24*17.5
XGYLF-L5-204-E34	50*45*1185	34W	80-160 lm/W	3000K-8000K	IP40	12	122.5*24*17.5
XGYLF-L5-205-E40	50*45*1485	40W	80-160 lm/W	3000K-8000K	IP40	12	152.5*24*17.5

❑ Lumen Efficacy is Customizable

LED Linear Fixture



LED Purification Lamps

12





Full Plastic

Metal+Plastic

Features :

- ❑ Designed to Light in 5 Direction without Dark Area
- ❑ High Quality SMD 2835 Chips of Optional Light Efficacy & CCT
- ❑ Large Lighting Surface and High Lighting Power.
Support Multiple Connections. No Light Flickering IC Driver
- ❑ ALU+PC Body Material. PC Cover and End Cap
- ❑ Plug-and-Socket | Male & Female Connectors
Solutions, Optional Switches

Adjust CCT button switch

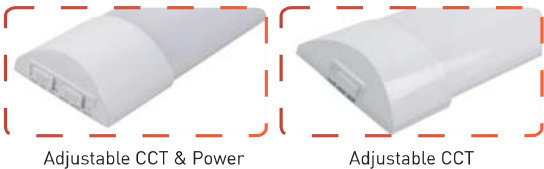

CB CE ErP 



No Flicker



Ra70/80



25000HRS



S: AC 180-265V
U: AC 85-265V



For Indoor



120°



0.5/0.9

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL102-E18 [702/202]	75*22*600	18W	80-160 lm/W	3000K-8000K	10	62.5*16.5*18.5
XGYPL103-E24 [703/203]	75*22*900	24W	80-160 lm/W	3000K-8000K	10	92.5*16.5*18.5
XGYPL104-E36 [704/204]	75*22*1200	36W	80-160 lm/W	3000K-8000K	10	122.5*16.5*18.5
XGYPL105-E40 [705/205]	75*22*1500	40W	80-160 lm/W	3000K-8000K	10	152.5*16.5*18.5

❑ Lumen Efficacy is Customizable

LED Linear Fixture


Prism Lens LED Linear Batten



13

Features:

- ❑ Opal or Prism Lens Cover
- ❑ High Power Linear Batten
- ❑ Metal Body + PC Caps



CB CE ErP 



No Flicker



Dimmable
Option



Ra70/80



25000h



S: AC 180-265V
U: AC 85-265V



For Indoor



170°



>0.5

Model No. 产品规格	Dimension WxHxL (mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	IP Level IP等级	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYLF-A76-104-E36/48	60*25*1200	36W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*14
XGYLF-A775-104-E72	75*25*1200	72W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*16.5
XGYLF-A790-104-E100	90*25*1200	100W	80-100lm/W	3000K-8000K	IP40	20	121.5*26*20
XGYLF-A7135-104-E120	135*30*1200	120W	80-100lm/W	3000K-8000K	IP40	20	121.5*31.5*15

❑ Lumen Efficacy is Customizable