

LED Panels & Downlight



LED Backlit - Standard & Ultra Slim



UGR<19
Optional




01



Standard | Ultra Slim

Opt.1: Sensor




Opt.2: IP65



Opt.3: 3CCT



Opt.4: 3CCT & 3POWER

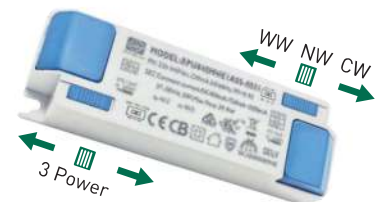

CB CE ErP 



No Flicker



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



112°



0.5/0.9

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BE-6060-E40	595*595*30	24-60W	80-180 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BEUS-6060-E40	595*595*27	(Isolated)					
XGYPL-BE-30120-E40	295*1195*30	24-60W	80-180 lm/W	3000K-6500K	White	6	125*22.5*34
XGYPL-BEUS-30120-E40	295*1195*27	(Isolated)					
XGYPL-BE-60120-E60	595*1195*30	24-60W	80-180 lm/W	3000K-6500K	White	6	125*22.5*61
XGYPL-BEUS-60120-E60	595*1195*27	(Isolated)					

 Lumen Efficacy is Customizable

LED Panels & Downlight



LED Side Emission



02



Side Emission



CB CE ErP 



No Flicker



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



112°



0.5/0.9

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-SE-6060-E40	595*595*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	63.5*17.5*67
XGYPL-SE-6262-E40	620*620*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	63.5*17.5*67
XGYPL-SE-30120-E40	295*1195*9	24-60W (Isolated)	80-160 lm/W	3000K-6500K	White	5	123.5*17.5*37
XGYPL-SE-60120-E60	595*1195*9	50-72W (Isolated)	80-160 lm/W	3000K-6500K	White	5	123.5*17.5*67


 Lumen Efficacy is Customizable

LED Panels & Downlight




LED Frame Panel Light

03

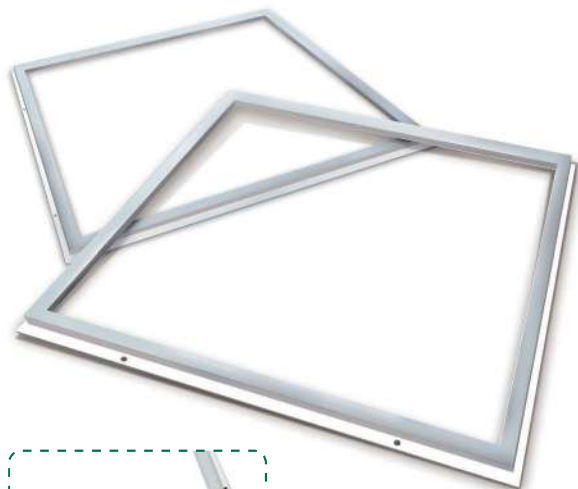

Opt.1: R/G/B



Opt.2: 3CCT



Opt.3: 3CCT & 3POWER



CB CE ErP 



No Flicker



Dimmable
Option



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



85°



0.5/0.9

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYFPL-6060-E40	591*591*11 601*601*11 614*614*11	40-60W (Isolated)	80-160 lm/W	3000K-6500K (RGB)	White	10	63*33.5*63.5

 Lumen Efficacy is Customizable

LED Panels & Downlight



LED Backlit Panel - UGR<16



04



CB CE ErP 



No Flicker



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



85°



0.5/0.9



UGR<16

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BE-6060-E40	595*595*32	24-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BE-30120-E40	295*1195*32	24-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	125*22.5*34
XGYPL-BE-60120-E60	595*1195*32	50-60W (Isolated)	80-150 lm/W	3000K-6500K	White	6	125*22.5*61

 Lumen Efficacy is Customizable

LED Panels & Downlight



LED Backlit Grid Panel - UGR<13

05



CB CE ErP 



No Flicker



Ra80/90



50000h



S:220V-240V
U:100V-240V



For Indoor



60°



0.5/0.9



UGR<13

Model No. 产品规格	Dimension WxLxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Frame Color 外框颜色	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYPL-BG-6060-E40	595*595*30	18-32W (Isolated)	80-180 lm/W	3000K-6500K	White	6	61.5*21.5*64
XGYPL-BG-30120-E40	295*1195*30	18-32W (Isolated)	80-180 lm/W	3000K-6500K	White	6	125*22.5*34


 Lumen Efficacy is Customizable

Installation







Surface Mounting Frame A

Panel Size	Frame size	Connection type
295*295*32mm	300*300*65mm	Snap-on/Screw
295*595*32mm	300*600*65mm	Snap-on/Screw
595*595*32mm	600*600*65mm	Snap-on/Screw
295*1195*32mm	300*1200*65mm	Snap-on/Screw
595*1195*32mm	600*1200*65mm	Snap-on/Screw
620*620*32mm	625*625*65mm	Snap-on/Screw

- Distinguished from integral frame, assemblable with parts
- Suitable for integral solid ceiling installation
- Small packaging size, easy transportation, saving freight cost

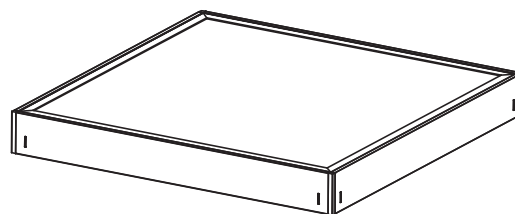

06

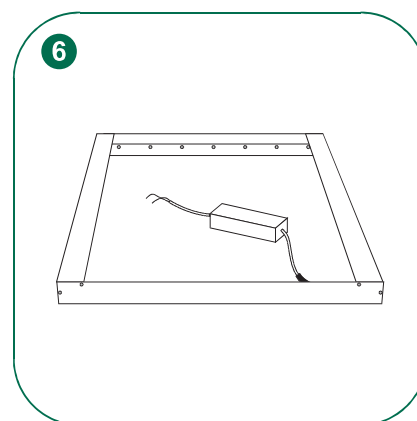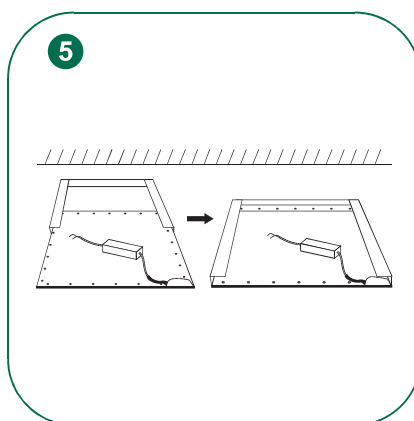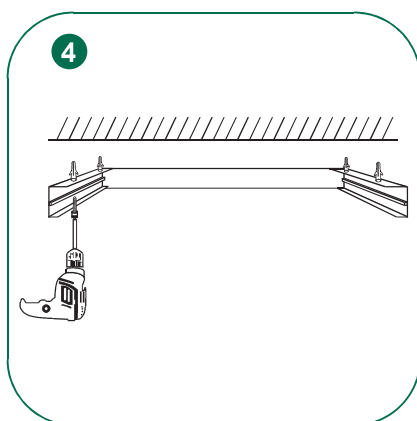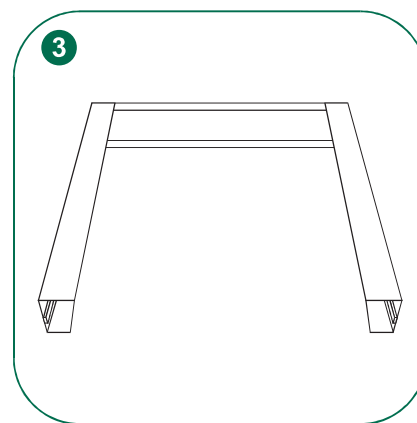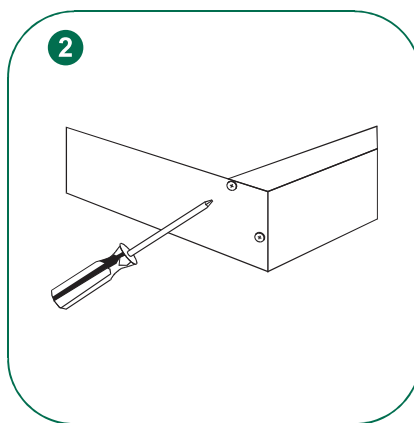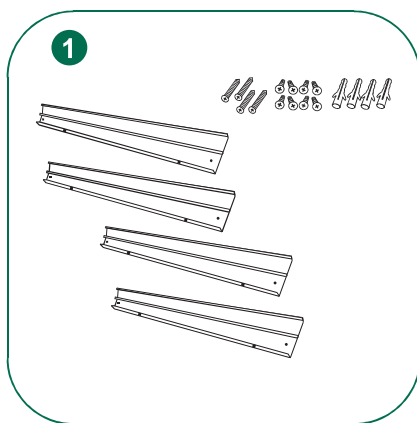







Installation

Surface Mounting Frame B

Panel Size	Frame size	Connection type
295*295*9mm	300*300*43mm	Snap-on
295*595*9mm	300*600*43mm	Snap-on
595*595*9mm	600*600*43mm	Snap-on
295*1195*9mm	300*1200*43mm	Snap-on
595*1195*9mm	600*1200*43mm	Snap-on
620*620*9mm	625*625*43mm	Snap-on


07

- Distinguished from integral frame, assemblable with parts
- Easier installation, clean appearance, no screw can be seen
- Small packaging size, easy transportation, saving freight cost

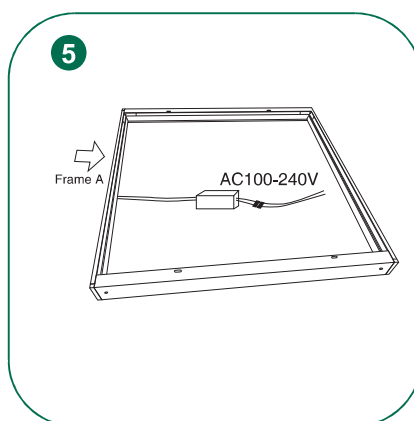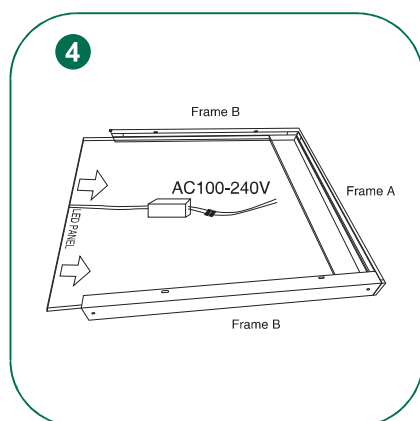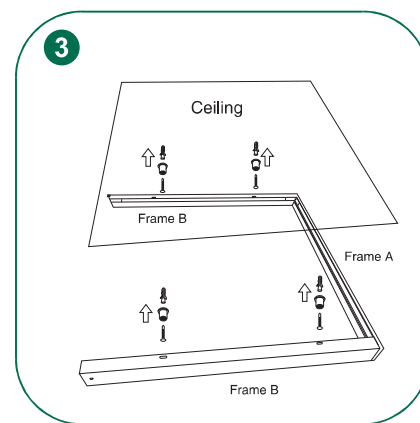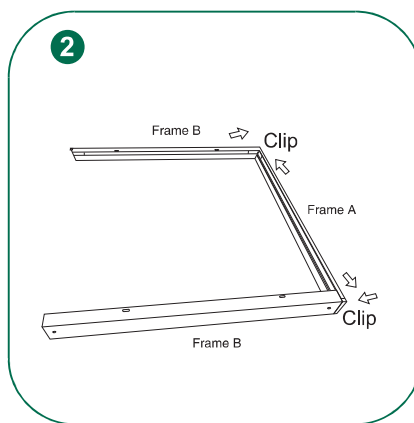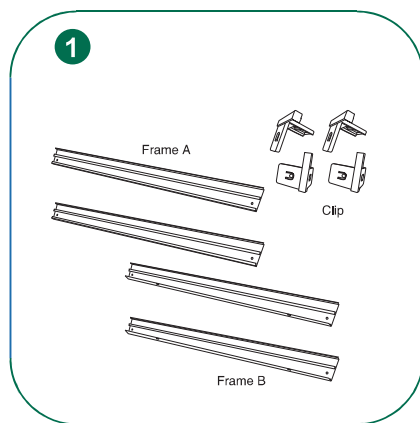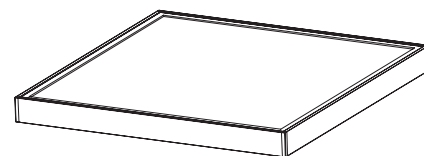


Installation

Suspension Wire (Y-shaped)

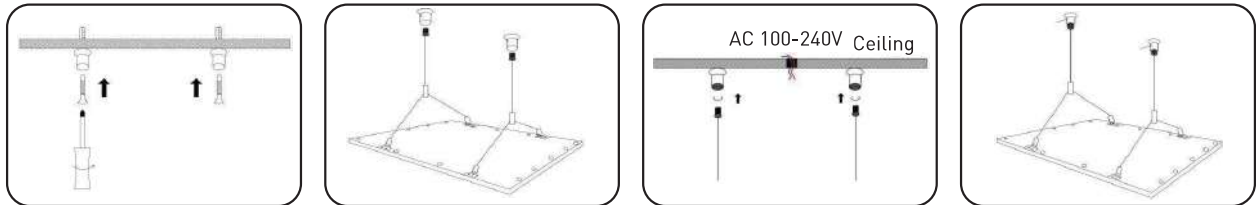


Suspension Wire (I-shaped)

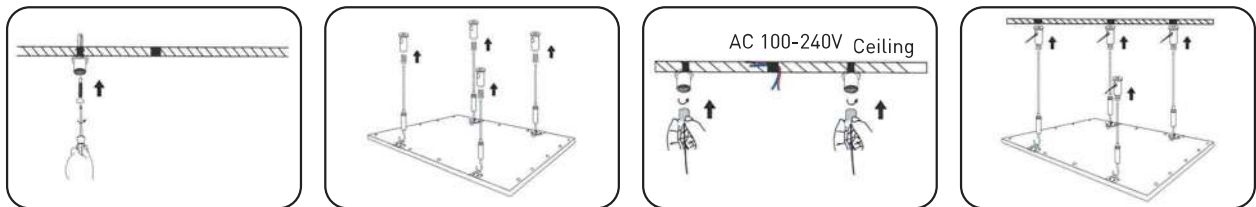

08

Spring clips

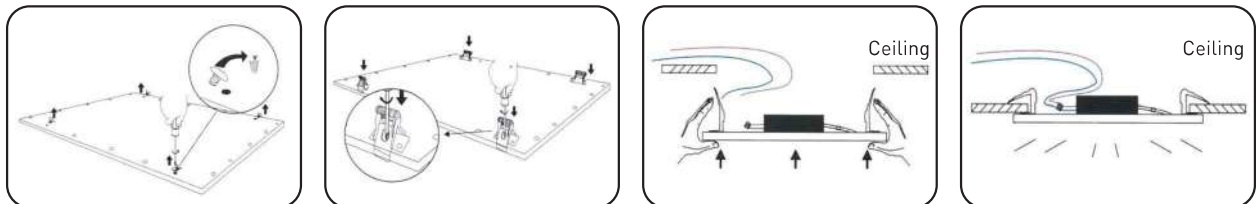

Accessories



Suspension Wire (Y-shaped)
2pcs/set 3pcs/set
main cable: 0.8m
branch cable: 0.8m(0.4m each side)



Suspension Wire (I-shaped)
4pcs/set 6pcs/set
main cable: 1m



Spring clips
L49.4*W30*H19mm



Connection box
L73*W27*H30mm
2pin



Connection box
L76*W39.25*H22.5mm
3pin



GST-18 plug



Euro plug



SAA plug



South African plug

LED Panels & Downlight



LED Small Panel DOB Backlit (Full Plastic)



IP20
Protection Level

09



3000K



4000K





6400K



Suspended Mounting

Features

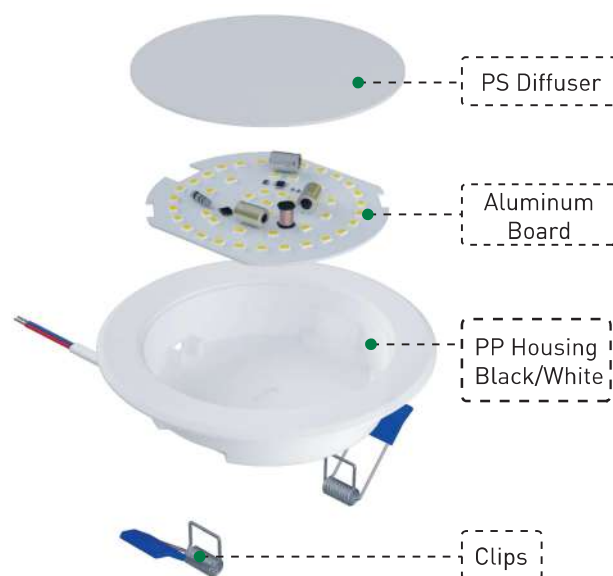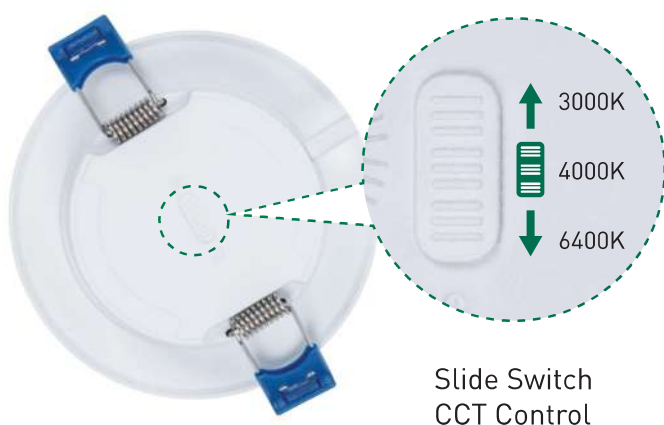

CB CE ErP 



No Flicker



Ra80



25000h



S:220V-240V
U:85-265V




For Indoor



120°



0.5

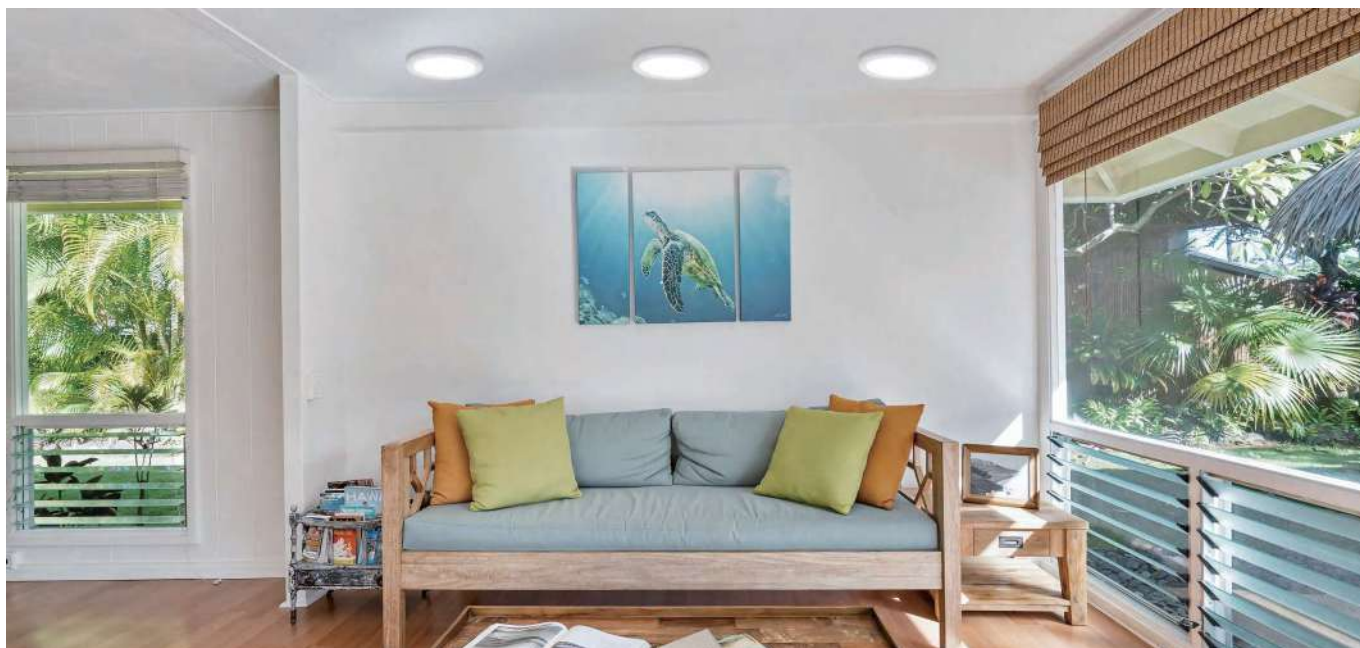

Recessed Mounting



Suspended Mounting

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-PPDOB-E3/6 (DCCT)	Φ93*26.5	3/6W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ70-75	60	31.5*31*22
XGYSPLRR-PPDOB-E9/12 (DCCT)	Φ121*26.5	9/12W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ95-100	40	31.5*26.7*27.7
XGYSPLRR-PPDOB-E15 (DCCT)	Φ154*26.5	15W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ125-135	40	33.5*31.5*34
XGYSPLRR-PPDOB-E18 (DCCT)	Φ177*26.5	18W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ145-150	20	31.5*37.7*20.6
XGYSPLRR-PPDOB-E24 (DCCT)	Φ225*26.5	24W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	Φ190-195	20	46.7*31.5*25.1
XGYSPLRS-PPDOB-E3/6 (DCCT)	93*93*26.5	3/6W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	75*75	60	37.5*36.5*22
XGYSPLRS-PPDOB-E9/12 (DCCT)	122*122*26.5	9/12W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	100*100	40	36.5*31*27.8
XGYSPLRS-PPDOB-E15 (DCCT)	155*155*26.5	15W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	125*125	40	37.5*36.5*34.5
XGYSPLRS-PPDOB-E18 (DCCT)	170*170*26.5	18W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	140*140	20	40.5*36.5*19.5
XGYSPLRS-PPDOB-E24 (DCCT)	220*220*26.5	24W	80lm/w Module 105lm/W	3000K-6500K 3000/4000/6400K	190*190	20	51.5*36.5*24.5

☒ Slide Switch 3 CCT & Surface Mounting Frame are Optional / CTN MEAS are Based on Recess Models

LED Panels & Downlight



LED Small Panel External Driver (Full Plastic)



Installation:
Recessed & Suspended



IP54
Protection Level



3 Color in 1 Lamp
Choose By DIP Switch

11

CB CE ErP



No Flicker



Ra80|90



25000h



170-265V



For Indoor



120°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-PC-E5 (DCCT)	Φ95*26	5W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ75-90	100	51*36*21.5
XGYSPLRR-PC-E9 (DCCT)	Φ120*26	9W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ90-110	100	62*36*26
XGYSPLRR-PC-E12 (DCCT)	Φ45*26	12W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ120-135	60	46*36*31.5
XGYSPLRR-PC-E18 (DCCT)	Φ170*26	18W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ140-160	60	53*38*36
XGYSPLRR-PC-E24 (DCCT)	Φ220*26	24W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ190-210	40	46*38*46
XGYSPLRS-PC-E5 (DCCT)	95*95*26	5W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ75-90	100	51*36*21.5
XGYSPLRS-PC-E9 (DCCT)	120*120*26	9W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ90-110	100	62*36*26
XGYSPLRS-PC-E12 (DCCT)	145*145*26	12W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ120-135	60	46*36*31.5
XGYSPLRS-PC-E18 (DCCT)	170*170*26	18W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ140-160	60	53*38*36
XGYSPLRS-PC-E24 (DCCT)	220*220*26	24W	85/100 lm/W	3000K-6500K 3000/4000/6400K	Φ190-210	40	46*38*46

LED Panels & Downlight



LED Small Panel (Aluminum)



12



IP20
Protection Level



Recessed Mounting



Suspended Mounting

CB CE ErP 



No Flicker



Ra80



25000h



U:100V-240V
S:185-265V



For Indoor



120°



0.5

Model No. 产品规格	Dimension DxH / LxWxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Body Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYSPLRR-ALU-E12	Φ160*27	12W	65lm/W	3000K-6500K	PP+Iron	Φ150	50	54.6*21*36.9
XGYSPLRS-ALU-E12	168*168*26					150x150		
XGYSPLRR-ALU-E18	Φ220*26	18W	65lm/W	3000K-6500K	PP+Iron	Φ200	30	70*21*47
XGYSPLRS-ALU-E18	218*218*22					200x200		
XGYSPLRR-ALU-E24	Φ292*22	24W	65lm/W	3000K-6500K	PP+Iron	Φ285	20	61.2*21*61.2
XGYSPLRS-ALU-E24	292*292*22					285x285		
XGYSPLSR-ALU-E12	Φ162*25	12W	65lm/W	3000K-6500K	PP+Iron	-	50	50.5*15.5*34.3
XGYSPLSS-ALU-E12	162*162*25							
XGYSPLSR-ALU-E18	Φ210*25	18W	65lm/W	3000K-6500K	PP+Iron	-	30	65*15.5*43.9
XGYSPLSS-ALU-E18	210*210*25							
XGYSPLSR-ALU-E24	Φ286*25	24W	65lm/W	3000K-6500K	PP+Iron	-	20	59*29*30
XGYSPLSS-ALU-E24	286*286*25							

LED Panels & Downlight



LED Downlight of Different Beam Angle (Full Plastic)

13



Installation
Recessed



IP44
Protection Level

3000K

4000K

6500K



D60



D75



D90



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



0.5




UGR<19

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen 流明	Color Temp. 色温	Beam Angle 光束角度	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-D60-E8-CCT	Φ104*97	8W	720 lm	3000/4000/6500K	60°	Φ90	30	42.5*28.5*55
XGYDL-D75-E9-CCT	Φ112*70	9W	820 lm	3000/4000/6500K	75°	Φ90	30	42.5*28.5*40.5
XGYDL-D90-E9-CCT	Φ115*60	9W	820 lm	3000/4000/6500K	90°	Φ90	40	50*33.6*26.5

LED Panels & Downlight



LED Anti-Glare Downlight (Full Plastic)

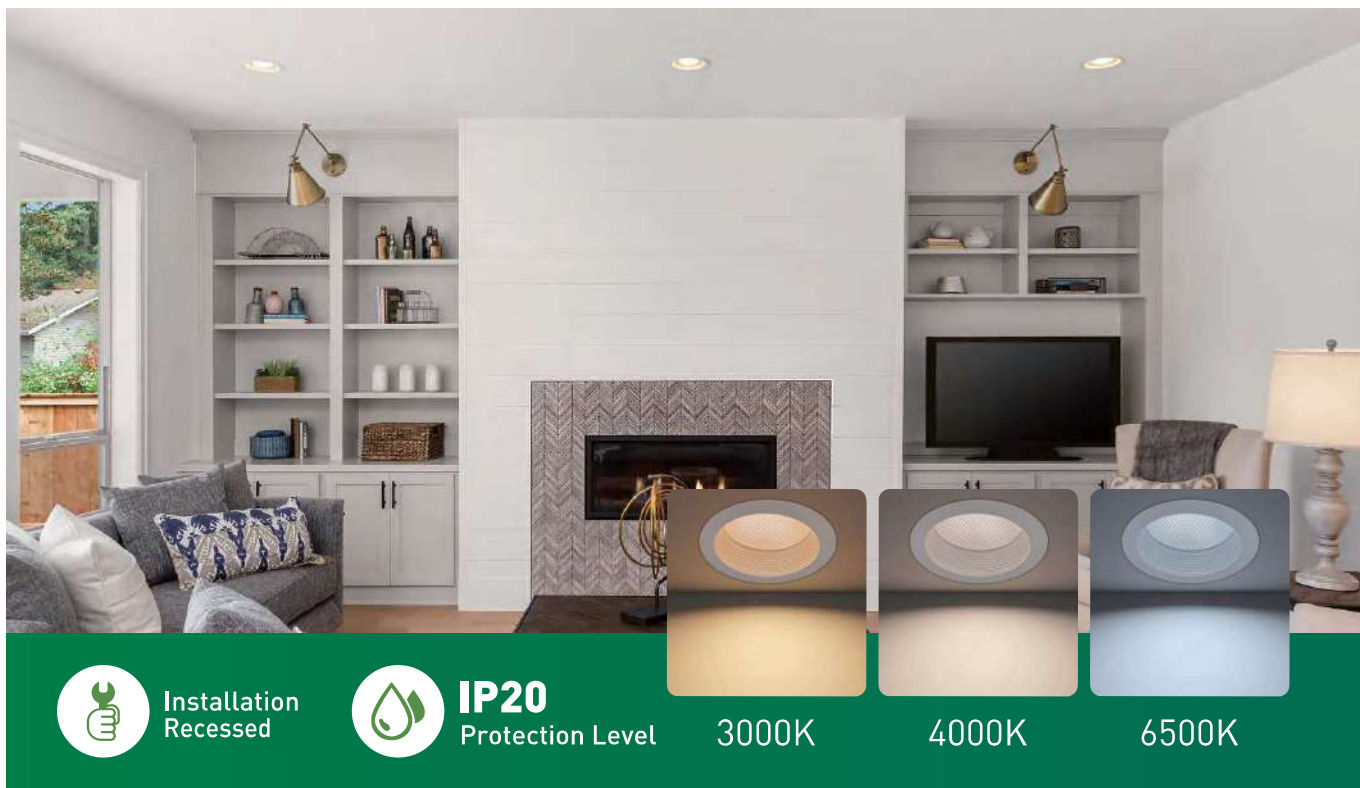

14



Installation
Recessed



IP20
Protection Level

3000K

4000K

6500K



AG60RR3.5 White



AG60RR3.5 Black



AG60RR4.5 White



AG60RR4.5 Black

CB CE ErP 



No Flicker



Non
Dimming



Ra80



25000h



U:100V-240V
[DOB]



For Indoor



03



0.5



UGR<19

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Beam Angle 光束角度	Body Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-AG60RR3.5-E8 -SS3CCT(Recessed)	Φ106 95*50	8W	60 lm/W	3000/4000/6500K	60°	DP PS Body PP	30	34*31*24.5
XGYDL-AG60RR4.5-E12 -SS3CCT(Recessed)	Φ131 110*52	12W	60 lm/W	3000/4000/6500K	60°	DP PS Body PP	30	41.5*31*29.5

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)

15



ITFT01-A



ITFT01-B



ITFT01-C

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



60°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT01-E10	Φ90*30.5	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	100	54.5*42*27
XGYDL-ITFT01-E15	Φ120*33	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	80	54*47*32
XGYDL-ITFT01-E20	Φ140*35	20W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ120	60	47*47*35
XGYDL-ITFT01-E25	Φ170*39	25W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	30	56*27*41
XGYDL-ITFT01-E30/40	Φ220*44	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ195	20	48*29.5*48

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



16



ITFT02-A



ITFT02-B



ITFT02-C



ITFT02-D

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



60°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT02-E10	Φ90*46.1	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ70	80	42*38.5*42
XGYDL-ITFT02-E15	Φ120*46.5	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ90	40	54*28*38.5
XGYDL-ITFT02-E20/25	Φ170*56	20W/25W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ140	30	56*38*43.5
XGYDL-ITFT02-E30/40	Φ220*62.5	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ200	20	48*47*48

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)

17



ITFT05A



ITFT05A

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



60°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 流明	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT05A-E7	Φ88.5*42	7W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	50	52*22*37
XGYDL-ITFT05A-E10	Φ120*43	10W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	50	67*28*36
XGYDL-ITFT05A-E15	Φ170*43	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	50	67*28*36
XGYDL-ITFT05A-E20	Φ195*44	20W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ170	20	43*30*43
XGYDL-ITFT05A-E30/40	Φ225*45	30W/40W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ205	20	47.5*30*47.5
XGYDL-ITFT05A-E50/60	Φ225*51.5	50W/60W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ205	20	47.5*30*47.5

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



18



ITFT18-1-White



ITFT18-1-Black



ITFT18-2

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



120°/60-90°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGY-ITFT18-E8	Φ90*45	8W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ75	100	54.5*42*27
XGY-ITFT18-E15	Φ125*45	15W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ95	80	54*47*32
XGY-ITFT18-E24	Φ170*49.5	24W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ145	30	56*27*41
XGY-ITFT18-E30	Φ220*56	30W	80 lm/W	3000-6500K	Diecasting Aluminum	Φ200	20	48*29.5*48

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)

19



LY601



LY601



LY601

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



15°/24°/36°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	Cutout Size 开孔尺寸(mm)	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDW-LY601-E7	Φ63*60	7W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ50	60	35*26*34
XGYDW-LY601-E12	Φ83*80	12W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ75	40	42*25*45
XGYDW-LY601-E18	Φ95*93	18W	80 lm/W	4CCT 3000/4000K/6500K/IC	Diecasting Aluminum	Φ80	40	46*50*32

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



20



ITFT01M-A



ITFT01M-B



ITFT01M-C

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



60°




0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT01M-E10	Φ70*60	10W	80 lm/W	3000-6500K	Diecasting Aluminum	60	39.5*26*34
XGYDL-ITFT01M-E15	Φ85*70	15W	80 lm/W	3000-6500K	Diecasting Aluminum	40	42*21*40
XGYDL-ITFT01M-E20	Φ105*70	20W	80 lm/W	3000-6500K	Diecasting Aluminum	40	48*44.5*25
XGYDL-ITFT01M-E30	Φ135*80	30W	80 lm/W	3000-6500K	Diecasting Aluminum	20	31*47*31

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)

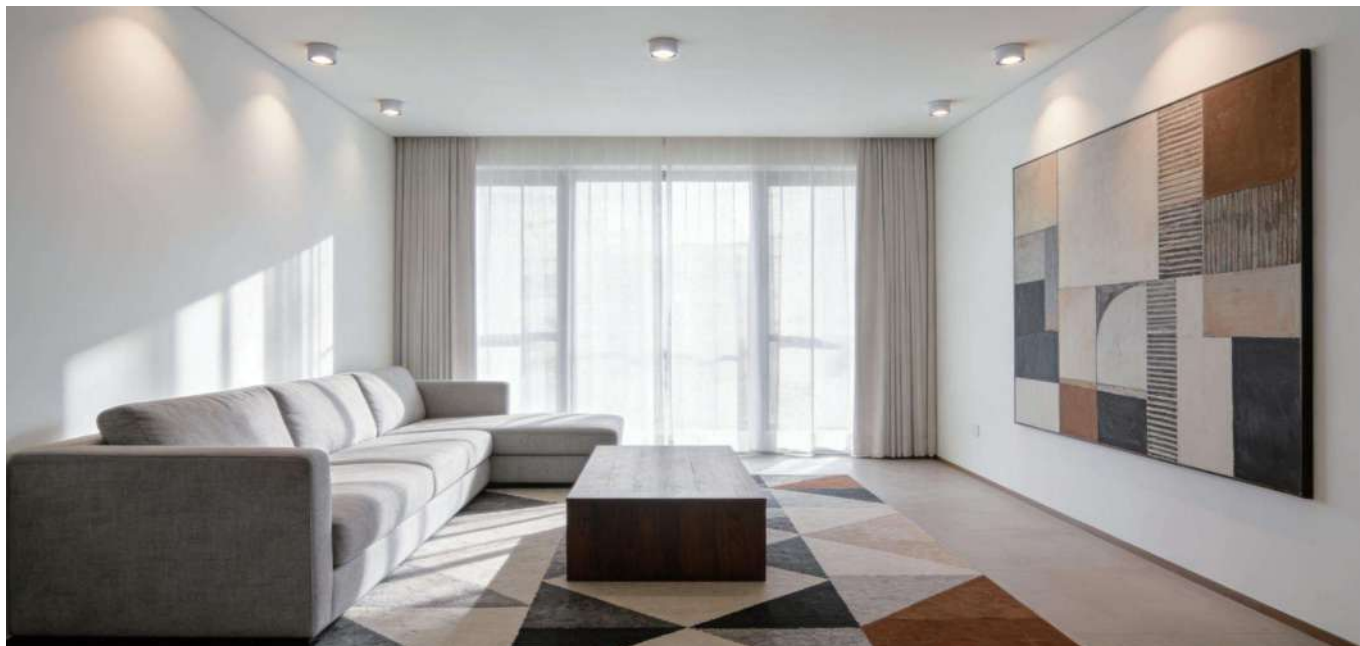

21



ITFT09-White



ITFT09-Black

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



90-120°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT09-E7	Φ58*68	7W	80 lm/W	3000-6500K	Aluminum	60	38*28*36
XGYDL-ITFT09-E10	Φ72*75	10W	80 lm/W	3000-6500K	Aluminum	60	41*30*38
XGYDL-ITFT09-E15	Φ83*86	15W	80 lm/W	3000-6500K	Aluminum	40	42*35*40
XGYDL-ITFT09-E20	Φ109*92	20W	80 lm/W	3000-6500K	Aluminum	40	60*58*35
XGYDL-ITFT09-E25	Φ131*102	25W	80 lm/W	3000-6500K	Aluminum	20	30*55*38
XGYDL-ITFT09-E30	Φ159*141	30W	80 lm/W	3000-6500K	Aluminum	20	38*60*38
XGYDL-ITFT09-E40/50	Φ187*127	40W/50W	80 lm/W	3000-6500K	Aluminum	20	52*58*42

LED Panels & Downlight



LED Downlight (Die-Cast Aluminum)



22



ITFT10-White



ITFT10-Black

CB CE



No Flicker



0~100%



Ra80



25000h



S:220V-240V



For Indoor



60°



0.5

Model No. 产品规格	Dimension DxH(mm)	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	Material 材质	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYDL-ITFT10-E10	Φ75*100	10W	80 lm/W	3000-6500K	Aluminum	60	45*40*46
XGYDL-ITFT10-E20	Φ100*120	20W	80 lm/W	3000-6500K	Aluminum	40	46*33*52
XGYDL-ITFT10-E30	Φ120*150	30W	80 lm/W	3000-6500K	Aluminum	40	54*62*42
XGYDL-ITFT10-E40	Φ150*180	40W	80 lm/W	3000-6500K	Aluminum	20	42*68*53

LED Panels & Downlight



LED GU10 Module

23



CB CE ErP 



No Flicker



Dimmable
Option



Ra80



25000h



S:220V-240V
(LC DOB)



For Indoor



60°



>0.7/0.5

Features :

-  Emiss. Direction: Back Emission(Recessed)
-  Compatible With: GU10 Fixture/ Ring
-  Body Color: White
-  Body Of PA / Lens Of PC



**FRONT IP44
BACK IP20**
PROTECTION
LEVEL OF FRONT



Single CCT




3 CCT & Dimmable

Model No. 产品规格	Dimension DxH(mm)	LENS 透镜	Rated Power 额定功率	Lumen Efficacy 光效	Color Temp. 色温	PCS/CTN 装箱数量	CTN MEAS. 装箱尺寸(cm)
XGYGU10M60-E6 [SS3CCT]	Φ50*25	60°	6W	90lm/w	3000K-6500K (3000/4000/6500K)	100	42.5*29.5*13.5
XGYGU10M60-E7	Φ50*30	38°	7W	90lm/w	3000K	100	42.5*29.5*14

LED Panels & Downlight



GU10 / GU10 Module Fixtures & Rings

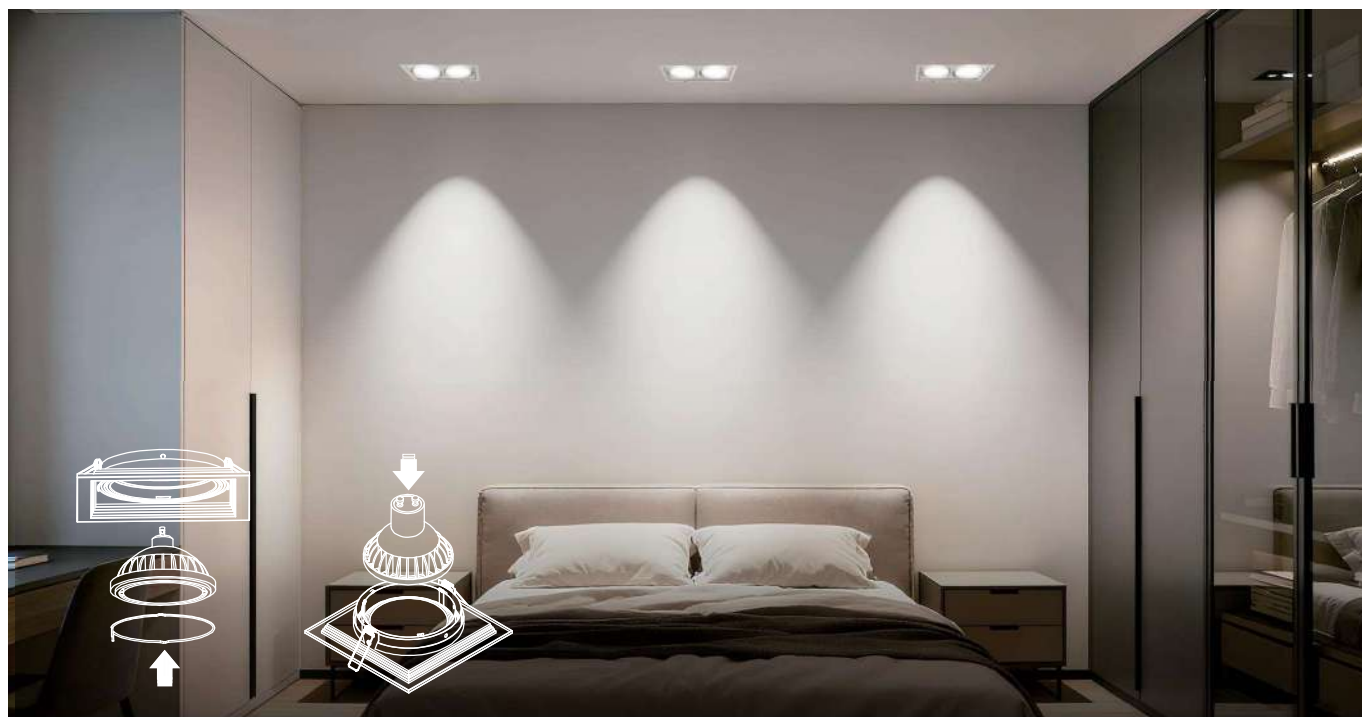

24

CB CE ErP 



○ White

● Black

● Golden

● Silver

● Brushed



○ ● XGYGU10FR-L025

Dimension D*H / C (mm)	Material 材质
Φ82*24 / 70	Aluminum Painted Electroplated

○ ● ● XGYGU10FR-L004

Dimension D*H / C (mm)	Material 材质
Φ90*28 / 65	Iron Painted Electroplated

○ ● XGYGU10FR-L015

Dimension D*H / C (mm)	Material 材质
Φ90*22 / 75	Iron Painted Electroplated

○ ● XGYGU10FR-L006

Dimension D*H / C (mm)	Material 材质
Φ95*28 / 65	Iron Painted Electroplated

○ ● XGYGU10FR-L007

Dimension D*H / C (mm)	Material 材质
Φ88*24 / 70 Φ90*28 / 70	Iron Painted Electroplated

○ ● XGYGU10FR-L014

Dimension D*H / C (mm)	Material 材质
Φ120*25 / 80	Iron Painted Electroplated



XGYGU10FR-L035

Dimension	Material
D*H / C (mm)	材质
Φ82*24 / 70	Aluminum Painted Electroplated



XGYGU10FR-L032

Dimension	Material
D*H / C (mm)	材质
Φ94*30 / 80	Aluminum Painted Electroplated



XGYGU10FR-L030

Dimension	Material
D*H / C (mm)	材质
Φ85*22 / 70	Aluminum Painted Electroplated



XGYGU10FR-L044

Dimension	Material
D*H / C (mm)	材质
Φ82*24 / 70	Aluminum Painted Electroplated



XGYGU10FR-L040

Dimension	Material
D*H / C (mm)	材质
Φ83*24 / 75	Zinc Painted Electroplated



XGYGU10FR-L016

Dimension	Material
D*H / C (mm)	材质
Φ88*24 / 65	Iron Painted Electroplated



XGYGU10FR-L028

Dimension	Material
D*H / C (mm)	材质
Φ55*25 / 45	Zinc Painted Electroplated



XGYGU10FR-L008

Dimension	Material
D*H / C (mm)	材质
Φ97*25 / 80	Iron Painted Electroplated



XGYGU10FR-L011

Dimension	Material
D*H / C (mm)	材质
Φ105*46 / 80	Iron Painted Electroplated



XGYGU10FR-L012

Dimension	Material
D*H / C (mm)	材质
Φ105*25 / 80	Iron Painted Electroplated



XGYGU10FR-L041

Dimension	Material
D*H / C (mm)	材质
Φ83*24 / 75	Zinc Painted Electroplated



XGYGU10FR-L018

Dimension	Material
D*H / C (mm)	材质
Φ83*24 / 75	Iron Painted Electroplated

25



XGYGU10FR-DLPR-201-WH

Dimension	Material
D*H / C (mm)	材质
Φ95*35 / 75	ABS



XGYGU10FR-DLPS-201

Dimension	Material
W*H*T / C (mm)	材质
90*90*35 / 75	ABS



XGYGU10FR-DLPR-301

Dimension	Material
D*H / C (mm)	材质
Φ81*36 / 75	ABS



XGYGU10FR-DLPS-301

Dimension	Material
W*H*T / C (mm)	材质
81*81*36 / 75	ABS



XGYGU10FR-DL200

Dimension	Material
D*H / C (mm)	材质
Φ81*30 / 55 Φ81*36 / 75	Iron Painted



XGYGU10FR-DL201

Dimension	Material
D*H / C (mm)	材质
Φ92*27 / 70	Iron Painted



XGYGU10FR-L001

Dimension	Material
D*H / C (mm)	材质
Φ80*32 / 55	Iron Painted Electroplated



XGYGU10FR-L013

Dimension	Material
D*H / C (mm)	材质
Φ84*30 / 60	Iron Painted Electroplated



XGYGU10FR-L027

Dimension	Material
D*H / C (mm)	材质
Φ86*26 / 60	Zinc Painted Electroplated



XGYGU10FR-L009

Dimension	Material
W*H*T / C (mm)	材质
88*88*32 / 60	Iron Painted Electroplated



XGYGU10FR-L039

Dimension	Material
W*H*T / C (mm)	材质
77*77*25 / 60	Zinc Painted Electroplated



XGYGU10FR-L037

Dimension	Material
W*H*T / C (mm)	材质
90*90*30 / 75	Aluminum Painted Electroplated



XGYGU10FR-L042

Dimension	Material
D*H / C (mm)	材质
Φ87*30 / 70	Aluminum Painted Electroplated



XGYGU10FR-L033

Dimension	Material
D*H / C (mm)	材质
Φ78*24 / 60	Aluminum Painted Electroplated



XGYGU10FR-L020

Dimension	Material
D*H / C (mm)	材质
Φ95*40 / 80	Iron Painted Plastic



XGYGU10FR-L021

Dimension	Material
D*H / C (mm)	材质
Φ90*25 / 80	Plastic



XGYGU10FR-L036

Dimension	Material
D*H / C (mm)	材质
Φ82*30 / 75	Aluminum Painted Electroplated



XGYGU10FR-L019

Dimension	Material
W*H*T / C (mm)	材质
88*88*40 / 80	Iron Painted Plastic



●●
XGYGU10FR-L010

Dimension	Material
W*H*T / C (mm)	材质
87*87*27 / 70	Iron Painted Electroplated




●●
XGYGU10FR-L038

Dimension	Material
W*H*T / C (mm)	材质
83*83*25 / 70	Zinc Painted Electroplated




●●
XGYGU10FR-L026

Dimension	Material
W*H*T / C (mm)	材质
90*90*24 / 75	Aluminum Painted Electroplated



●●
XGYGU10FR-L029

Dimension	Material
W*H*T / C (mm)	材质
55*55*25 / 45	Zinc Painted Electroplated



●●
XGYGU10FR-L034

Dimension	Material
W*H*T / C (mm)	材质
90*90*24 / 70	Aluminum Painted Electroplated



●●
XGYGU10FR-L031

Dimension	Material
W*H*T / C (mm)	材质
94*94*30 / 80	Aluminum Painted Electroplated



●●
XGYJLK-LCG1230-1

Dimension	Material
W*H*T (mm)	材质
182*182*46	Steel



●●
XGYJLK-LCG1230-2

Dimension	Material
W*H*T (mm)	材质
332*182*46	Steel



●●
XGYJLK-LCG1230-3

Dimension	Material
W*H*T (mm)	材质
482*182*46	Steel



●●
XGYJLK-LCG0130-1

Dimension	Material
W*H (mm)	材质
178*178	Steel



●●
XGYJLK-LCG0130-2

Dimension	Material
W*H (mm)	材质
325*178	Steel



●●
XGYJLK-LCG0130-3

Dimension	Material
W*H (mm)	材质
475*178	Steel



●●
XGYJLK-LCG1130-1

Dimension	Material
W*H*T (mm)	材质
185*185*150	Steel



●●
XGYJLK-LCG1130-2

Dimension	Material
W*H*T (mm)	材质
335*185*150	Steel




●●
XGYJLK-LCG1130-3

Dimension	Material
W*H*T (mm)	材质
485*185*150	Steel



●●
XGYJLK-LCG1130-4

Dimension	Material
W*H*T (mm)	材质
335*335*150	Steel



●●●
XGYGU10FR-L043

Dimension	Material
D*H / C (mm)	材质
Φ87*30 / 70	Aluminum Painted Electroplated



●●●
XGYGU10FR-L017

Dimension	Material
D*H / C (mm)	材质
Φ85*35 / 60	Iron Painted Electroplated



●●
XGYJLK-LCG1120-1

Dimension	Material
W*H*T (mm)	材质
134*134*106	Steel



●●
XGYJLK-LCG1120-2

Dimension	Material
W*H*T (mm)	材质
226*134*106	Steel



●●
XGYJLK-LCG1120-3

Dimension	Material
W*H*T (mm)	材质
320*134*106	Steel



●●
XGYJLK-LCG1120-4

Dimension	Material
W*H*T (mm)	材质
225*225*106	Steel



●●●
XGYGU10FR-L024

Dimension	Material
W*H*T / C (mm)	材质
83*83*35 / 75	Aluminum Painted Electroplated



●●●
XGYGU10FR-L023

Dimension	Material
D*H / C (mm)	材质
Φ83*35 / 75	Aluminum Painted Electroplated



●●●
XGYJLK-CS26

Dimension	Material
D*H (mm)	材质
Ø100*37	Steel/Aluminum Plastic



●●●
XGYJLK-CS27-1

Dimension	Material
W*H*T (mm)	材质
100*100*37	Steel/Aluminum Plastic



●●●
XGYJLK-CS27-2

Dimension	Material
W*H*T (mm)	材质
185*100*37	Steel/Aluminum Plastic



●●●
XGYJLK-CS27-3

Dimension	Material
W*H*T (mm)	材质
270*100*37	Steel/Aluminum Plastic



●●
XGYGU10FR-L047

Dimension	Material
D*H / C (mm)	材质
Φ163*160 / 140	Iron Painted Electroplated



●●
XGYGU10FR-L048

Dimension	Material
D*H / C (mm)	材质
Φ188*190 / 160	Iron Painted Electroplated